



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0043

ISSUED: 10-04

REVISED:

RECESSED MOUNTED JUMBO-ROLL TOILET PAPER DISPENSER

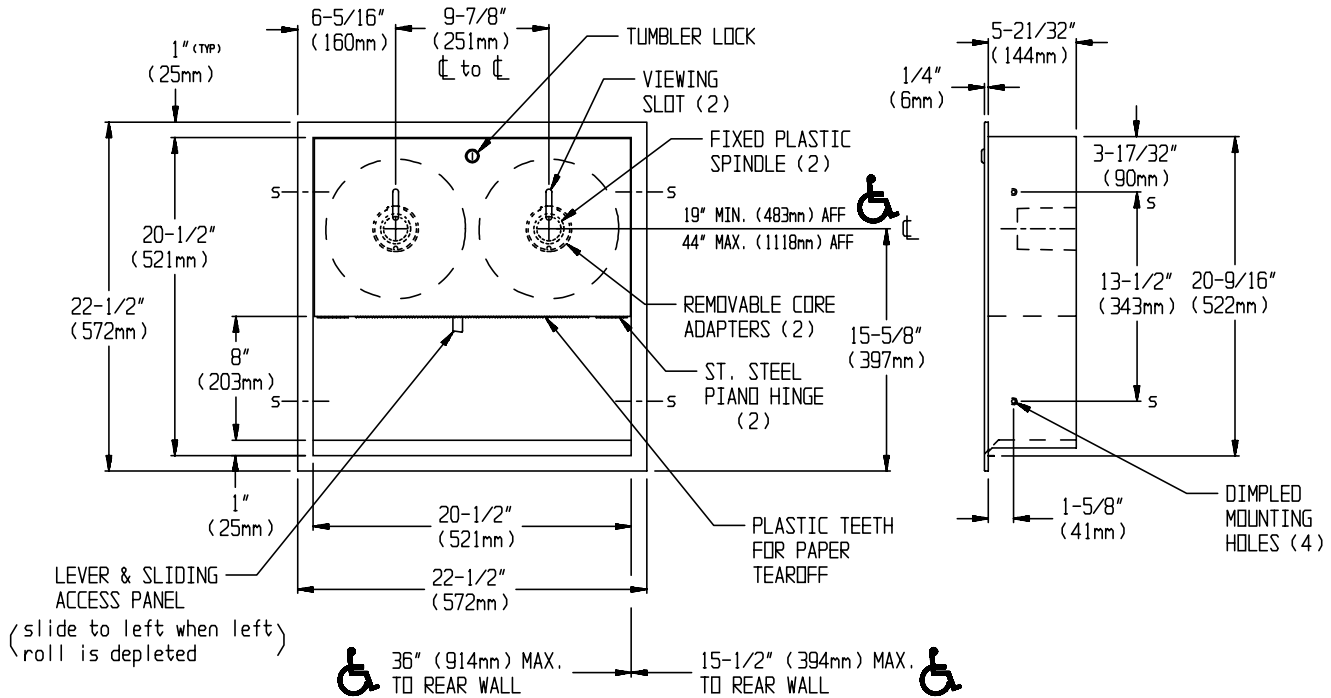

SPECIFICATION

ReCESSED Mounted Jumbo - Roll Toilet Paper Dispenser shall hold two (2) 9" (229mm) dia. rolls of 3" (76mm) dia. or 2-1/4" (57mm) dia. core toilet paper. Cabinet and door shall be fabricated of alloy 18-8 stainless steel, type 304. Door shall be 18 gauge and cabinet shall be 22 gauge. Face trim shall be 1" (25.4mm) wide formed from one piece with no mitres, welding or open seams and have 1/4" (6.35mm) square return to wall. Structural assembly of all components shall be of welded construction. All exposed surfaces shall be N° 4 satin finish and be protected during shipment with a PVC film easily removable after installation. Door shall be hung on heavy duty stainless steel piano hinges, shall be provided with two (2) tissue level viewing slots and shall be held closed by a tumbler lock keyed to other ASI washroom equipment. Dispensing mechanism shall be fabricated of high impact chemical and flame retardant ABS. Unit shall accommodate smaller core size rolls by removing the core adapters. When the left roll is depleted the right roll shall be selected by shifting the panel lever at bottom of unit to the left. Unit shall automatically reset during maintenance access.

ReCESSED Mounted Jumbo - Roll Toilet Paper Dispenser shall be Model N° 0043 as manufactured by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

Rough Wall Opening (RWO) required is 21" W x 21" H x 5-11/16" D minimum (533mm x 533mm x 144mm).

INSTALLATION

For general utility recess mount unit within 12" (305mm) of front of toilet from center line and 21" (533mm) above finished floor (AFF) from bottom of unit with four (4) N° 10 oval or flat head screws (not supplied) through mounting holes provided. For compliance with ADA Accessibility Guidelines install unit so that farthest edge of farthest roll or inside edge of cabinet is no farther than 36" (914mm) from back wall behind commode and centerline of rolls is 19" (483mm) minimum above finished floor (AFF) to 44" (1118mm) max. AFF.

OPERATION

Two (2) 9" (229mm) OD jumbo rolls of toilet paper are mounted over 3" (76mm) ID core adapters. Two (2) 2-1/4" (57mm) ID core rolls may be used by removing the core adapters. When the left roll of toilet paper is depleted, the right roll is selected by shifting the panel lever at the bottom of the unit to the left. Viewing slots continuously reveal toilet paper level. Keylocked door prevents unauthorized access or removal. Toilet paper supply is replenished on a cycle determined by maintenance needs.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.