




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0347-EU

ISSUED: 02/06

REVISED: 08/10

VERTICAL SOAP DISPENSER

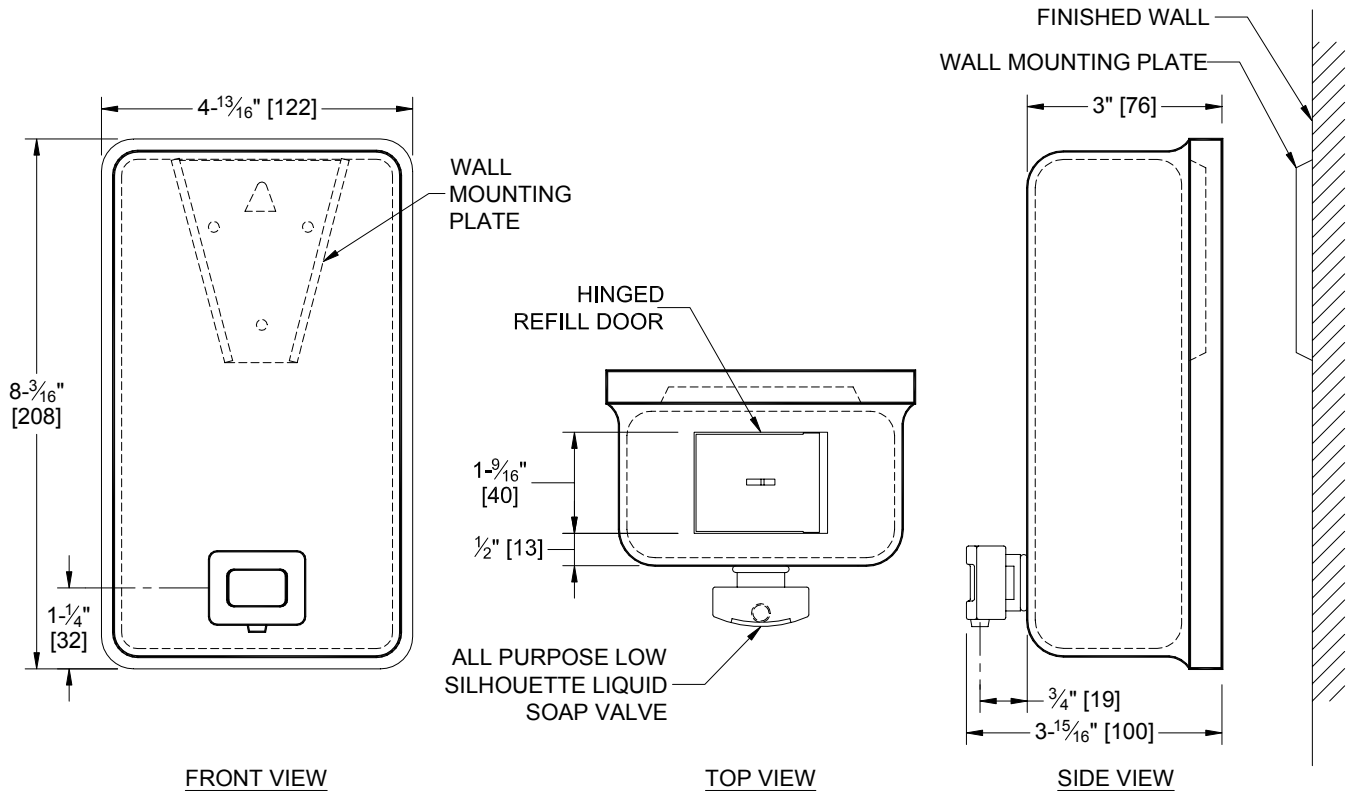

SPECIFICATION

Surface Mounted Vertical Soap Dispenser shall have a capacity of 33 fluid oz. (976ml) of liquid or lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and/or Triclosan. Acceptable viscosity shall be between 20 and 5500cP (mPa-s). Acceptable soap pH level shall be between 4 to 10 Dispenser shall be fabricated of 20 gauge type 304 stainless steel alloy 18-8 and shall have a seamless liner molded of HDPE. All exposed surfaces shall be satin finish. Valve shall be constructed of a plastic valve body and push button with stainless steel and plastic internal parts. Valve operation shall comply with ADA Accessibility Guidelines by requiring no more than 5 lbs_f (22.2 Newtons) pressure to actuate and require no grasping or twisting by operator. Unit shall have a hinged stainless steel refill door on top of unit, which is opened with special key provided.

Surface Mounted Vertical Soap Dispenser shall be Model № 0347-EU of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Unit is surface mounted to wall or partition with a wall mounting plate (supplied) and screws (by others). Unit is secured to interlocking wedge bracket and locked in place by a screw (supplied) installed through rear wall and accessed thru unlatched hinged refill door. Recommended installation for general utility is 42" (1066) AFF or 6" (152) minimum above washbasin.

OPERATION

Push button to dispense soap. Unit is refilled through hinged door at top requiring special key (supplied) to open. Soap tank will continue to feed properly until soap level is below valve intake port. Tank supply is replenished manually on cycle determined by maintenance needs. Do not overfill soap to level above locking screw in tank.