



**AMERICAN SPECIALTIES, INC.**


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000  
www.americanspecialties.com

MODEL No: 121

ISSUED: 01-87

REVISED: 07-08

**SECURITY CLOTHES HOOK - REAR MOUNTED**

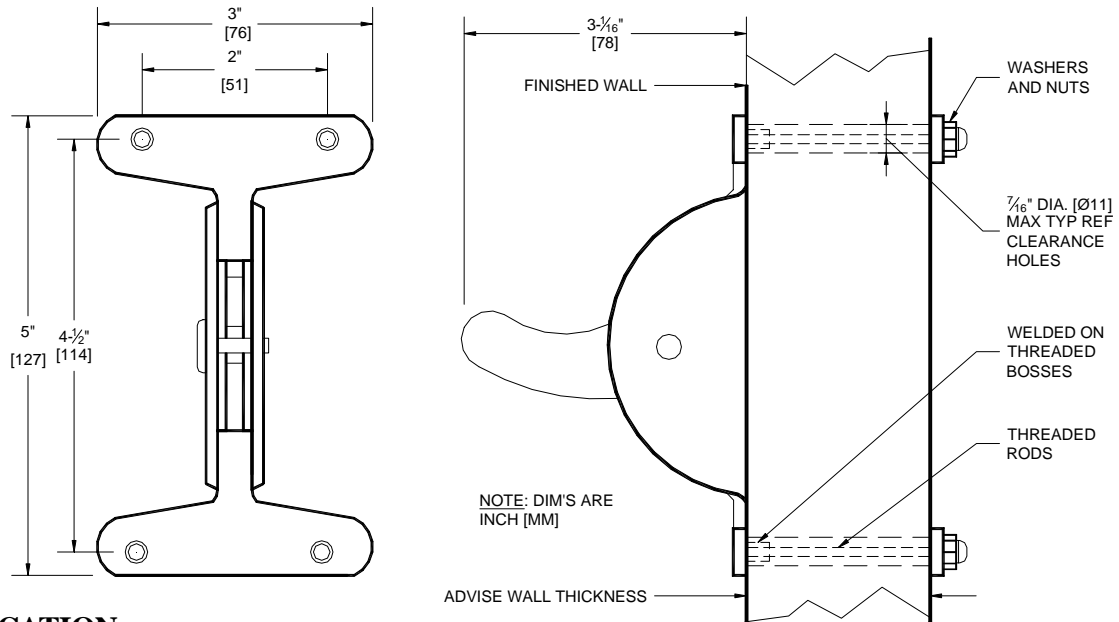

**SPECIFICATION**

Rear Mounted Security Clothes Hook shall be fabricated of type 304 stainless steel alloy 18-8. Hook shall be 7 gauge and wall bracket shall be 11 gauge. Wall plate shall have four (4) welded-on rear mounted 1/4-20 internally-threaded posts that shall receive 1/4-20 threaded zinc-plated steel studs (supplied) of length specified to suit field conditions and shall include washers and nuts. Safety hook tension is adjustable by means of a captive round head stainless steel spanner screw. Hook shall smoothly drop down when load exceeds 35 lb (16 kg) limit when correctly set. Hook geometry and bracket shall prevent hook from being set in vertical-up position. All exposed surfaces shall have N° 4 satin finish.

**Front Mounted Security Clothes Hook shall be Model N° 121 of American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

**INSTALLATION**

Unit is rear mounted to wall or partition using four (4) 1/4-20 threaded studs, washers and nuts (supplied) to suit wall condition. For compliance with ADA Accessibility Guidelines, install unit so the top of the hook is 48" (1219) maximum above finished floor (MAX AFF). Unit is supplied as standard with threaded studs suitable for mounting on walls up to 6" (152) thick. Other wall thickness over 6" (152) must be specified in chart for fabrication of adequate length studs. Locate and drill 3/8" to 7/16" diameter (Ø10- Ø11) holes through wall or partition to install threaded studs from rear.

Indicate thickness of wall with check mark "✓" and specify length if over 8" (203)

Up to 6" (152)	8" (203)	Over 8" (203)	Specify W = _____ Inches
----------------	----------	---------------	--------------------------

**OPERATION**

Clothes hook will release down when overloaded beyond the 35 lb (16 kg) limit. Hook tension may be adjusted to maintain trip threshold over the life of the product.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.