



AMERICAN SPECIALTIES, INC.



441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000
www.americanspecialties.com

MODEL No: 1350-0213

ISSUED: 1-87

REVISED: 5-06

TELEPHONE ACCOMMODATION WITH ACOUSTIC PANELS, WRITING SHELF AND DIRECTORY HOLDER SHELF

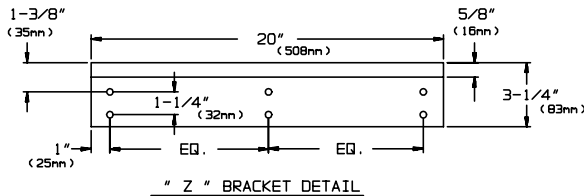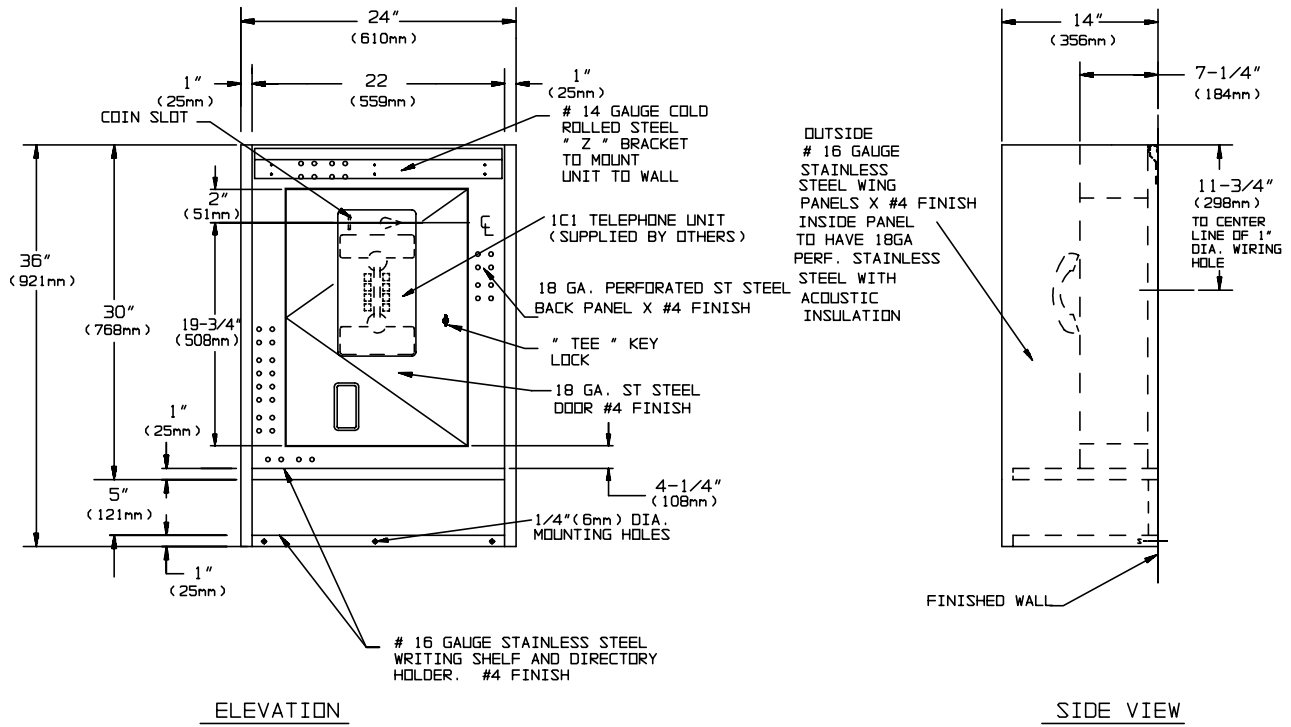

SPECIFICATION

Telephone Accommodation with Acoustic Panels, Writing Shelf & Directory Holder Shelf shall have back panel and inside of wing panels fabricated of 18 gauge perforated stainless steel alloy 18-8 type 304; door shall be 18 gauge stainless steel; outside wing panels and shelves shall be fabricated of 16 gauge stainless steel. All exposed surfaces shall have a N^o4 satin finish. Unit shall have double wall construction with sound absorbing filler. Unit is prepared to accept standard N^o IC1 surface mounted telephone (provided by others) onto mounting plate behind concealed hinge door with T-key lock to provide panel phone look. Unit shall be provided with a 14 gauge cold rolled steel "Z" clip inside top for concealed mounting and three (3) 1/4" diameter (Ø6.4mm) mounting holes concealed on bottom under directory shelf to secure unit to wall. For multiple bay installations [option -17-n] add 23" (584mm) to overall width for each additional telephone.

Telephone Accommodation shall be Tellette Model N^o 1350-0213 as manufactured by American Specialties, Inc. 441 Saw Mill River Road, Yonkers, NY 10701-4913.

INSTALLATION

Secure "Z" bracket to finished wall with screws (by others) into suitable blocking or other wall reinforcements. Installer must furnish mounting hardware to suit wall construction. Hang assembled booth onto wall bracket and install screws (by others) through mounting holes in rear of directory shelf to make unit non removable. Telephone instrument (provided by others) is then set onto back plate of unit. Screws (by others) are installed to lock instrument to back plate. Door is then secured making total assembly theft-resistant. Suggested mounting height for general utility is 70" (1778mm) maximum above finished floor (MAX AFF) to the top of unit to place coin slot at 65" (1651mm) MAX AFF. For compliance with ADA Accessibility Guidelines side reach access mount unit 54" (1372mm) MAX AFF to the centerline of coin slot.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.