



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000
www.americanspecialties.com

MODEL No: 1350-131617-2

ISSUED: 2-87

REVISED: 4-06

DUAL BAY TELEPHONE ACCOMMODATION WITH LIGHT FIXTURES AND WRITING AND DIRECTORY HOLDER SHELVES

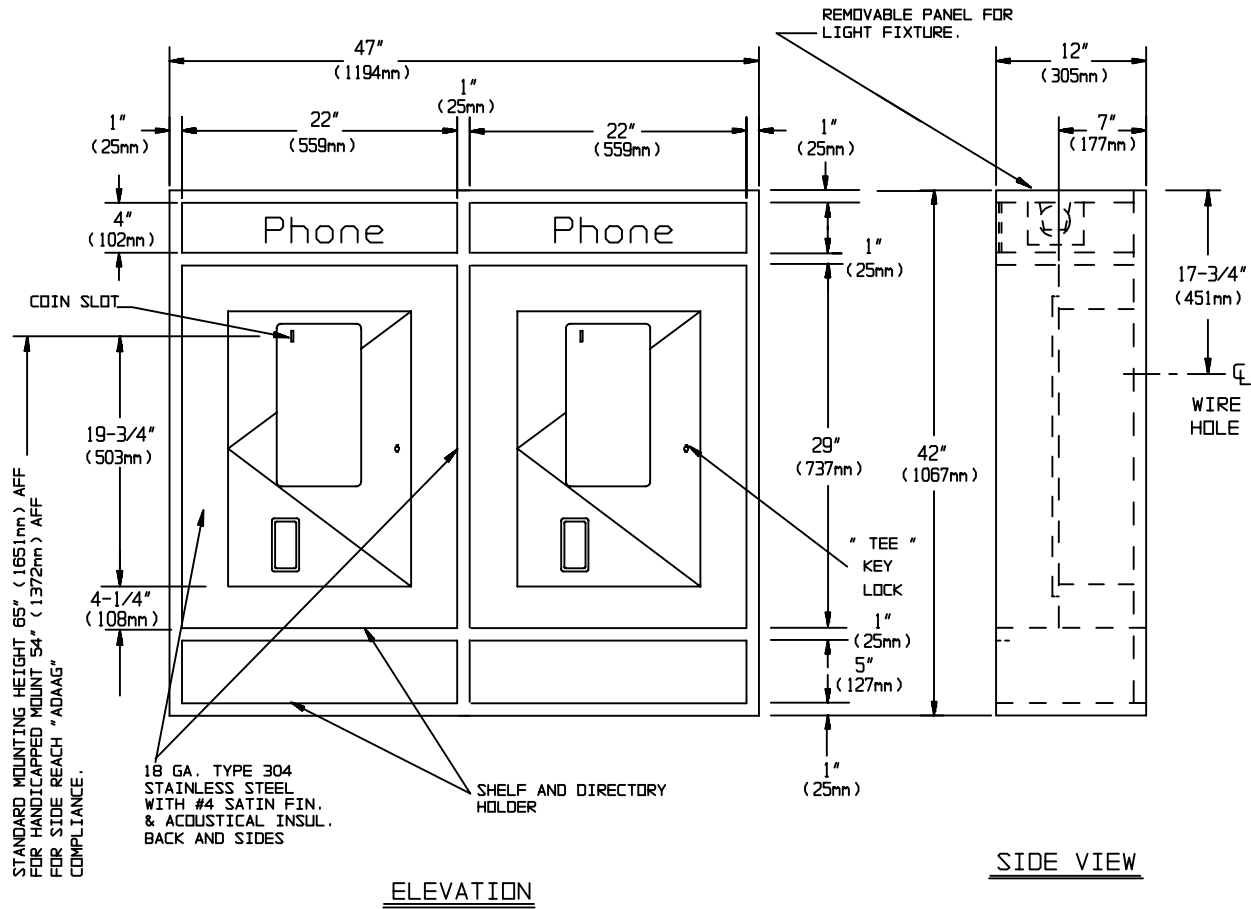

SPECIFICATION

Dual Bay Telephone Accommodation with Writing Shelves and Directory Holder Shelves, Headers and Lighted Signs shall have double wall construction with sound absorbing filler and shall have back panels, doors and inside of wing panels fabricated of 18 gauge stainless steel alloy 18-8 type 304; outside surfaces of wing panels and writing and directory holder shelves shall be fabricated of 16 gauge stainless steel. All exposed surfaces shall have a N^o 4 satin finish. The top shall have light fixtures to be wired to a remote wall switch or breaker by others. The lights shall illuminate down into booths and forward for diffusers with "PHONE" legends and shall have removable top access panels for wiring and servicing lamps. Units are prepared to accept standard N^o 1C1 surface mounted telephones (provided by others) onto mounting plates behind concealed hinge doors with T-key locks to provide panel phone look. Unit shall be provided with 14 gauge cold rolled steel "Z" clips inside tops for concealed mounting and three (3) 1/4" diameter (Ø6.4mm) mounting holes concealed on bottom under writing shelf of each bay to secure unit to wall.

Dual Bay Telephone Accommodation with Light Fixtures and Writing and Directory Holder Shelves shall be Tellette Model N^o 1350-131617-2 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913.

INSTALLATION

Secure "Z" brackets to finished wall with screws (by others) into suitable blocking or other wall reinforcements. Installer must furnish mounting hardware to suit wall construction. Hang assembled booth onto wall brackets and install screws (by others) through mounting holes in rear of directory shelves to make unit non removable. Telephone instruments (provided by others) are then set onto back plates of units. Screws (by others) are installed to lock instruments to back plates. Doors are then secured making total assembly theft-resistant. Light fixtures to be wired to remote wall switch or breaker by others are supplied with pig tail leads. Suggested mounting height for general utility is 82" (2083mm) AFF to the top of unit to place coin slots at 65" (1651mm) AFF. For compliance with ADA Accessibility Guidelines side reach access mount unit 54" (1372mm) MAX AFF to the centerline of coin slots, by installing unit with top at 71" (1803) MAX AFF.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.