




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 3414-25

ISSUED: 09/10

REVISED:

SWING-UP GRAB BAR WITH TOILET PAPER ROLL HOLDER

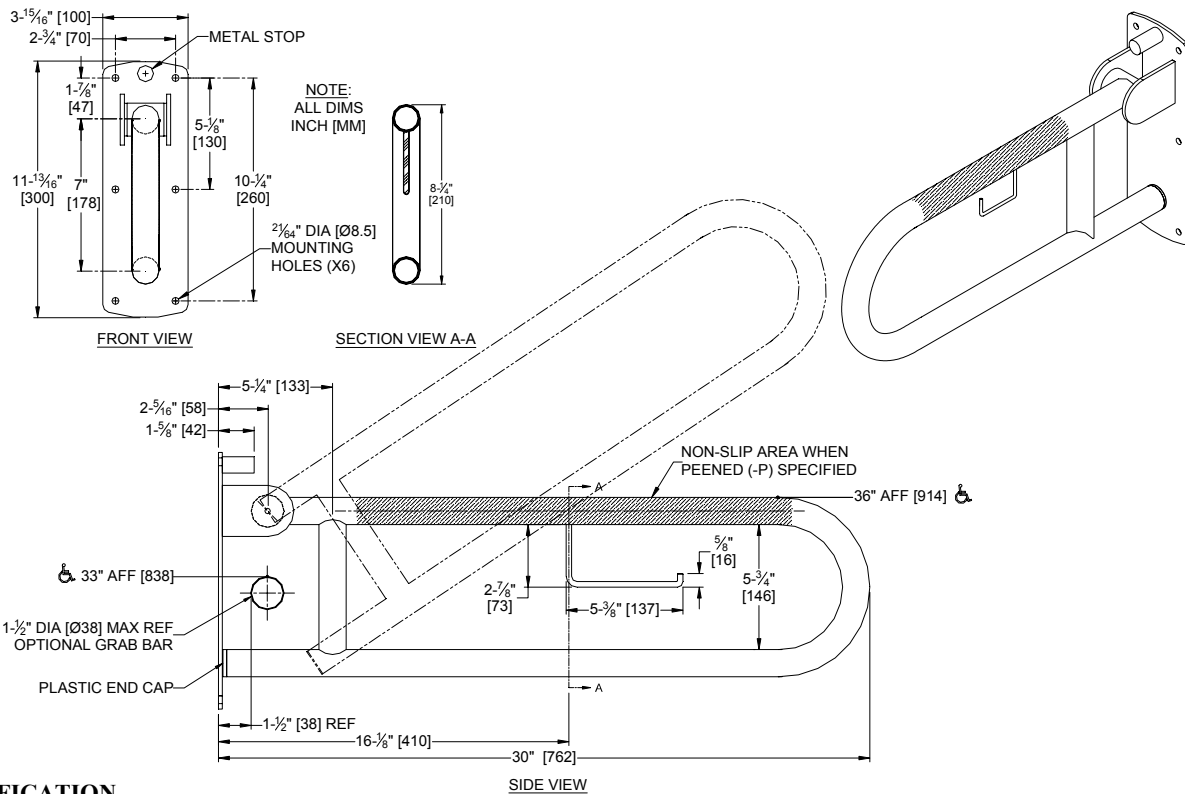

SPECIFICATION

Swing-up Grab Bar with integral TP Roll Holder shall be fabricated of stainless steel type 304 alloy 18-8. Grab bar tubing shall be 18 gauge x 1-1/4" diameter (Ø32). Mounting bracket shall be 6 gauge [3/16" thick (4.8)] back plate with six (6) 21/64" diameter (Ø8.5) mounting holes provided and 7 gauge [11/64" thick (4.4)] hinge pivot side plates. Bar shall have 1-1/2" diameter (Ø38) tubing hinge with three (3) preset detent stop positions and polymer anti-friction bearing plates to ensure quiet and smooth operation. Stops provided are at full up, 45° raised and full down. A polymer bumper is provided at the bottom bar end to prevent banging when lowered into use position. TP roll holder shall be formed from solid stainless steel type 304 alloy 18-8 rod 3/8" diameter (Ø9.5) with chamfered end. All exposed surfaces shall be satin finish. Structure shall be of welded construction. All exposed edges and corners shall be radiused and burr free. Tension for bar movement is accomplished by internal detent stops pawl provided. Grab bar shall be operable with only one hand. Bar mounting plate shall have a solid stop bumper to prevent raised bar from banging into wall.

Swing-up Grab Bar with integral TP Roll Holder shall be Model № 3414-25 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

This unit is surface mounted. Installer/construction contractor must provide concealed anchor plate or blocking as specified in construction documents or as required by local building codes prior to wall finishing. Fasten wall plate to concealed anchor or blocking plate with appropriate hardware through each of six (6) mounting holes provided. See "STRENGTH" section below. Note that concealed mounting plates or anchors and hardware are not supplied with this product. Ensure that mounting configuration complies with local building codes. For compliance with ABA-ADA Accessibility Guidelines, install unit so that top of horizontal bar is between 33" and 36" (838 to 914) above finished floor (AFF) for use by adults. Other heights are appropriate for other age groups at lower levels.

STRENGTH

ASI grab bars are designed to meet and exceed ADA/ABA-AG requirements as published in ICC/ANSI A117.1-2003 and 28 CFR Part 36, amended as of 23 July 2004, that fabricated product shall be of adequate strength to support a load in excess of 250 pounds (113.4 kg). Mounting to the wall is a critical part of the system to meet this requirement. The fastener system must be adequately sized to withstand the shear, tension or pullout, and torsion loads generated by the maximum loading.

OPERATION

Swing-up Grab Bar is lowered manually to horizontal position for support and raised for departure. Detent position stops prevent grab bar from dropping from the vertical position. Intermediate bar rest position at 45° raised is provided to allow easy lifting for access and egress by frail users. Balance tension is preset by factory and is not adjustable. Bumper provides positive bar stop at top rest position. TP roll holder upturned end prevents roll falling off during operation. Roll is used manually.

OPTIONS AVAILABLE

For unit without integral toilet paper roll holder see Model № 3414. For non-slip gripping surface add suffix -P (peened top bar surface).

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS, INC.