
Recessed Wall URN

Specialty Accessories

MasterFormat Section 10 28 13



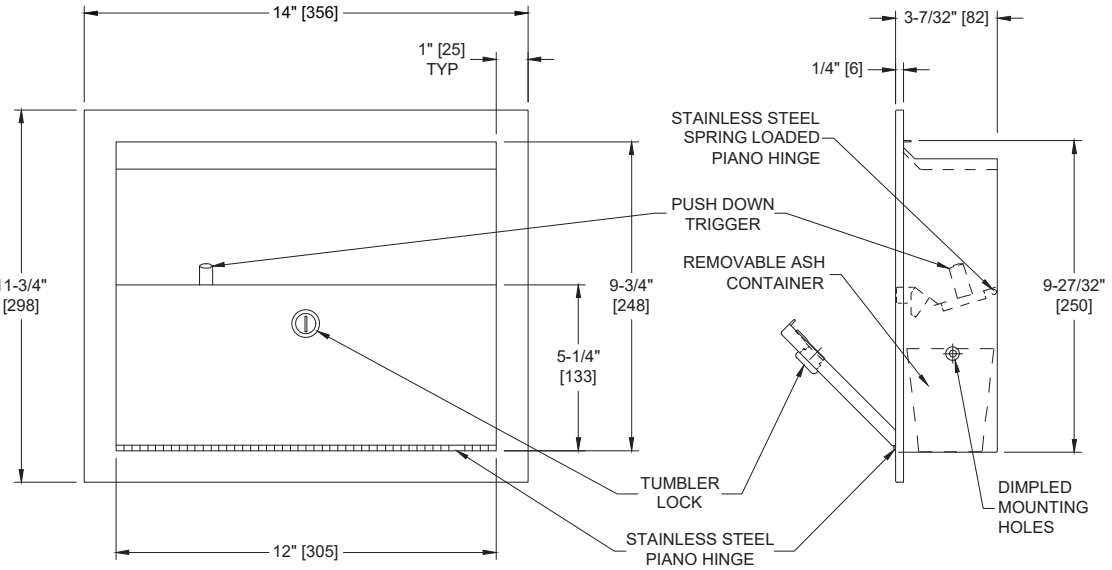

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

Scan for Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Provided with stainless steel flip top ashtray permanently attached to cabinet. Receptacle is fabricated of 22 gauge alloy 18-8 type 304 stainless steel and is removable. Ideal for lobby or corridor use. Service door shall be attached to cabinet with a stainless steel piano hinge and be held closed with a tumbler lock keyed alike to other ASI Washroom Equipment

KEY FEATURES & SPECIFICATIONS

- Stainless steel flip top ashtray permanently attached to cabinet.
- Ideal for lobby or corridor use.
- Type 304 Stainless Steel - Satin Finish
- Recessed
- Receptacle is removable

Operation & Maintenance

Stainless Steel washroom accessory products require regular surface cleaning, much the same as stainless steel sinks, pots and pans and eating utensils. As long as a regular cleaning schedule is followed, the best method is cleaning with a soft clean rag moistened with a mild detergent, followed by a water-moistened clean rag and then a dry rag. For a "new" look, surfaces can be wiped with lemon oil applied by a soft polishing cloth to maintain sheen. Stainless Steel should be protected against muriatic acid and caustic or abrasive materials, and harsh cleaning detergents with pH outside the range 7 ± 1.5. In the event such agents cause discoloration, polishing with a stainless steel cleaner such as 3M Stainless Steel Cleaner & Polish and a soft cloth on bright or mirror finishes, or for satin finish surfaces the Stainless Steel cleaner and 3M Scotch Brite pad either blue (less aggressive) or green (more aggressive) is recommended.

Technical Information / Product Properties

Property	Value
Dimensions	14" [356] W x 11-3/4" [298] H x 3-7/32" [82] D
Construction	Type 304 Stainless Steel - Satin Finish Removeable Receptacle
Mounting	Recessed
Capacity	

Installation

For general utility mount the unit 46" [1168] Above Finished Floor (AFF) from top of housing with #10 self-threading screws (by others) through concealed mounting holes provided in cabinet back.
Rough Wall Opening (RWO) required is 2-1/2" [318] W x 10-1/4"[260] H x 3- 1/8" [79] D minimum.

Additional Information

N/A

Warranty

One (1) Year from date of Invoice

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.