
Framed Mirror – #8 Mirror Polished St. Steel, Chase Mount, 12" x 16"


Security Accessories

MasterFormat Section 10 28 13



Scan for Information

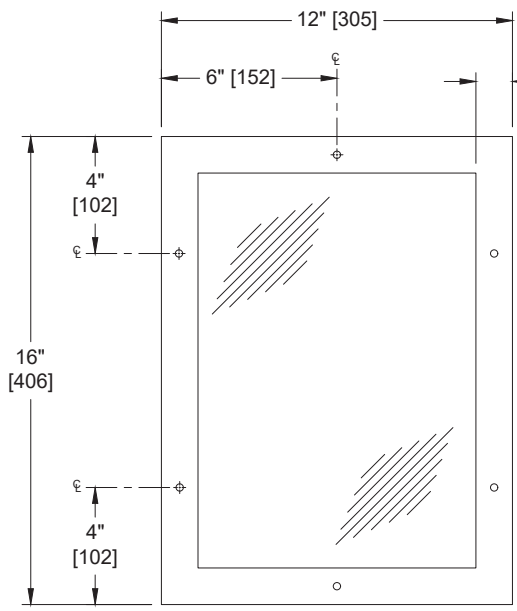

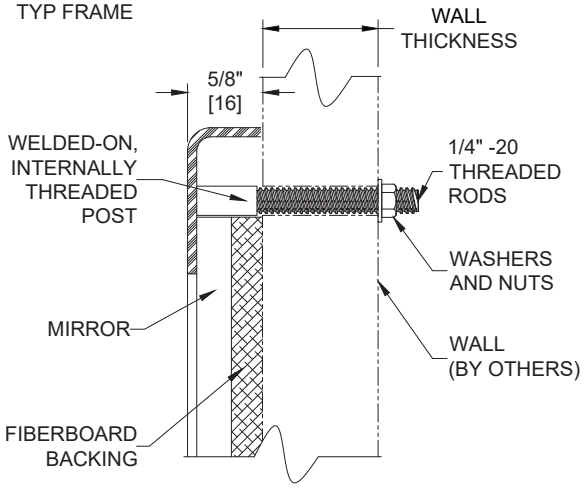

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Frame 14 gauge type 304, alloy 18-8 stainless steel with satin finish, corners welded and ground smooth. Unit provided with fiberboard backing and six "T" nuts welded on back for rear mounting. Specify wall thickness if greater than 6" [152]

KEY FEATURES & SPECIFICATIONS

- Security Framed Mirror
- Frame -Type 304, alloy 18-8 stainless steel - Satin Finish
- 14 gauge Frame
- Chase (Rear) Mount
- Options for reflective surface - Polished Stainless Steel, Tempered Glass or Plexiglass

Technical Information / Product Properties

Property	Value
Dimensions	12" [305] W x 16" [406] H x 5/8" [16] D
Construction	Type 304, alloy 18-8 stainless steel - Satin Finish 14 gauge Frame
Mounting	Chase (Rear) Mount
Materials	Frame: 14 gauge type 304, alloy 18-8 stainless steel

Installation

Unit is anchored through wall or partition using six (6) 1/4-20 threaded rods, washers & nuts (supplied). For compliance with the 2010 ADA Accessibility Standards and 2015 ABA Standards, bottom edge of reflecting surface should be no higher than 40" [1016] Above Finished Floor (AFF). For proper installation hardware selection specify the wall thickness on which unit is to be mounted (indicate thickness of wall with check mark and specify length if over 8" [203].

Size Options

Options

101-13: 1/4" [6] Thick Tempered Glass - Polished Mirror
101-17: 1/4" [6] Thick Plexiglass - Polished Mirror

101-14 - 20 ga type 304, alloy 18-8 stainless steel w/ #8 Mirror Polish

Wall Thickness:

Up to 6" [152]
8" [203]
Over 8" [203]
Specify W = _____ Inches

Glazing Options

(-13) Tempered Glass - 1/4" [6.4] thick polished tempered glass with two coats of silver. Hermetically sealed with an electrolytic copper plating. Back of mirror is finished and protected with a heavy waterproof paint. Glazing meets Federal Specification No. DD-G1403B, Amendment 1, ASTM C-1503 and ASTM-C-1048-92. Image quality: Good
(-14) Metal Mirrors - Type 304 alloy 18-8 stainless steel, 20 gauge polished to a #8 mirror finish. Image quality: Good
(-17) Plexiglas® - 1/4" [6.4] thick acrylic plastic, lightweight and highly shock resistant. Image quality: Very Good

Warranty

One (1) Year from date of Invoice

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.