Profile Collection Waste Receptacle – Recessed

Waste Receptacles | *Profile*

MasterFormat Section 10 28 13




Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

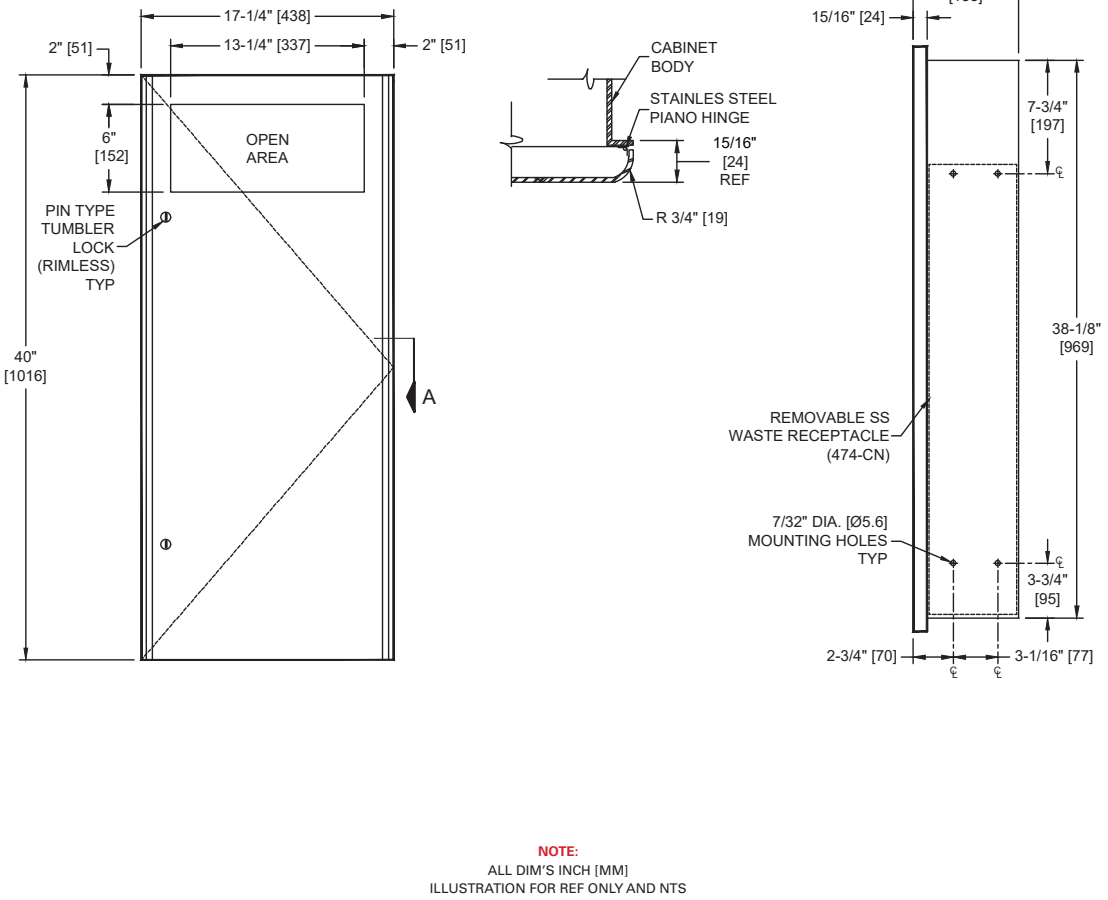

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Stainless steel waste receptacle holds 12 gal. (45.4 L) of washroom waste materials. Door is held closed with two (2) tumbler locks. Waste is inserted through opening at upper section of unit. Waste container fabricated of heavy duty stainless steel with a finger grip for easy removal. Locked door prevents unauthorized access or removal. Full face door shall be formed from one piece of 16 gauge alloy 18-8 type 304 stainless steel, cabinet shall be 20 gauge same grade stainless steel.

KEY FEATURES & SPECIFICATIONS

- Robust 16 gauge Stainless Steel face
- Curved (radius) edges add elegance
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 12 Gal. (17 L) Waste Capacity

Operation & Maintenance

Waste container is emptied manually on cycle determined by maintenance requirements. Keyed tumbler lock prevents unauthorized access or removal.

Technical Information / Product Properties

Property	Value
Dimensions	17-1/4" [438] W x 40" [1016] H x 7-3/16" [183] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	12 Gal. (17 L) Waste Capacity

Installation

Mount unit in wall recess using #10 self-threading screws (supplied by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that the center of the waste receptacle opening is 48" [1219] maximum Above Finished Floor (AFF).

Rough Wall Opening (RWO) required is 15-3/4" [400] W x 38-1/2" [978] H x 6-1/4" [159] D minimum

Options

N/A

Warranty

One (1) Year from date of Invoice

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.