**AMERICAN SPECIALTIES,** *INC.*
*441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000*
*www.americanspecialties.com*

| | |
|---|---|
| MODEL No: | 1305-1315 |
| ISSUED: | 1-87 |
| REVISED: | 6-06 |

# TELEPHONE ACCOMMODATION WITH DIRECTORY HOLDER, BINDER AND CHAIN

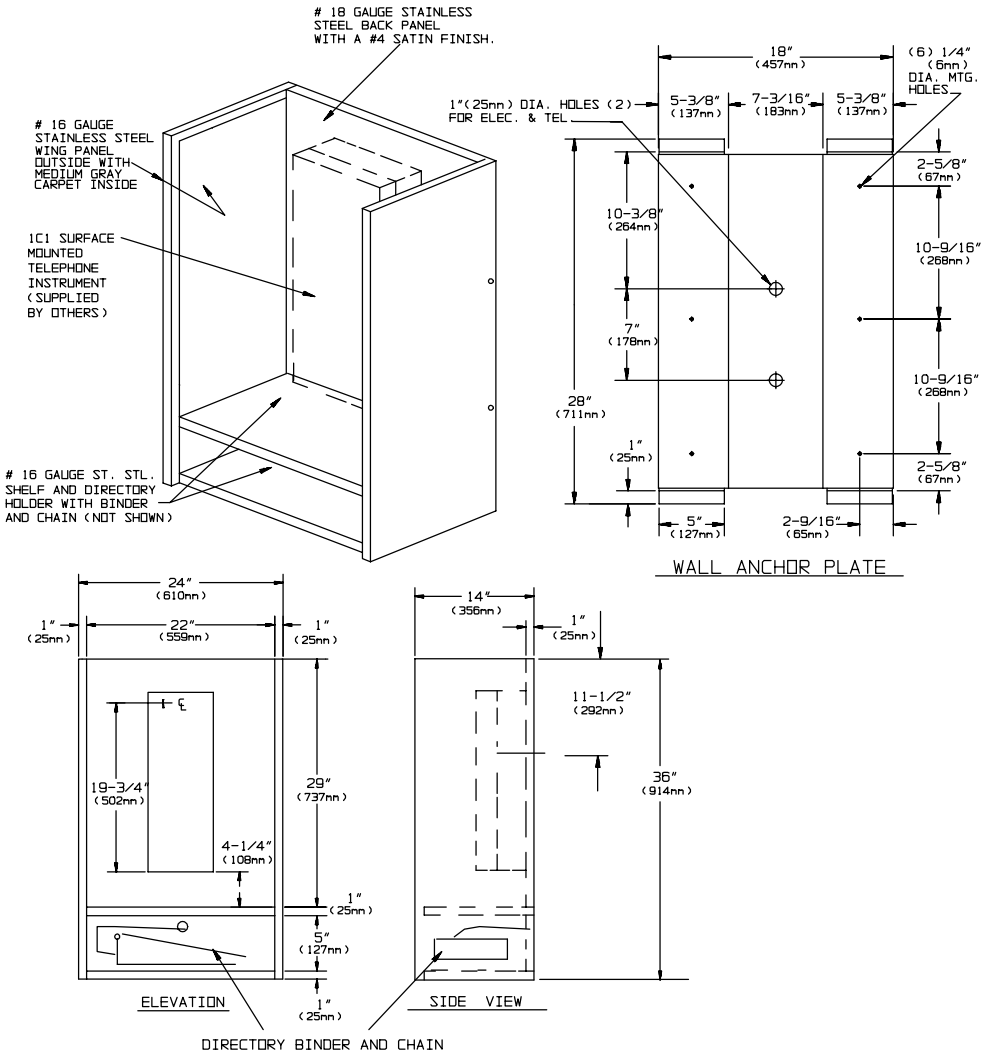


## SPECIFICATION

Telephone Accommodation with Directory Holder and Binder and Chain shall have back panel fabricated of 18 gauge stainless steel alloy 18-8 type 304 with a № 4 satin finish. Shelf, Directory Holder Shelf and wing panels exterior shall be 16 gauge stainless steel and wing panels shall have medium gray industrial carpet on the inside surface for sound control. All exposed surfaces shall have a № 4 satin finish. Unit is prepared to accept standard № 1C1 surface mounted telephone (provided by others) onto concealed mounting plate. Unit shall have wall anchor plate and mounting bracket fabricated of 18 gauge paint-lok steel, which shall have six (6) 1/4" diameter (Ø6.4mm) mounting holes, two (2) 1" diameter (Ø25.4mm) wiring holes and hole-slots and tapped holes for standard telephone mounting. Unit is provided with binder and chain for installation in directory holder compartment.

**Telephone Accommodation with Directory Holder, Binder and Chain shall be Tellette Model № 1305-1315 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913**

## INSTALLATION

Secure wall anchor plate to finished wall through six (6) mounting holes provided. Hang assembled booth onto wall anchor plate. Telephone instrument (supplied by others) is then set onto back of unit and secured, making total assembly theft-resistant. Binder and chain are furnished by ASI and installed by others to pre-drilled attachment hole. Installer must furnish mounting hardware to suit wall construction. Suggested mounting height for general utility is 70" (1778mm) AFF to the top of unit to place coin slot at 65" (1651mm) AFF. For compliance with ADA Accessibility Guidelines side reach access mount unit 54" (1372mm) MAX AFF to the centerline of coin slot, by installing unit with top at 59" (1499) MAX AFF.

**Accessory Specialties** AMERICAN DISPENSER Desert Ray Products WATROUS, INC.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE